查询IR2110L供应商

International
IOR Rectifier

Data Sheet No. PD-6.085

IR2110L4

HIGH AND LOW SIDE DRIVER

Features

- Floating channel designed for bootstrap operation
  Fully operational to +400V
  Tolerant to negative transient voltage
  dV/dt immune
- Gate drive supply range from 10 to 20V
- Undervoltage lockout for both channels
- Separate logic supply range from 5 to 20V
  Logic and power ground ±5V offset
- CMOS Schmitt-triggered inputs with pull-down
- Cycle by cycle edge-triggered shutdown logic
- Matched propagation delay for both channels
- Outputs in phase with inputs

Product Summary

V_{OFFSET}	400V max.
I_O+/-	2A / 2A
V_{OUT}	10 - 20V
$t_{on/off}$ (typ.)	120 & 94 ns
Delay Matching	10 ns

Description

The IR2110L4 is a high voltage, high speed power MOSFET and IGBT driver with independent high and low side referenced output channels. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. Logic inputs are compatible with standard CMOS or LSTTL outputs. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. Propagation delays are matched to simplify use in high frequency applications. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side configuration which operates up to 400 volts.

Absolute Maximum Ratings

Absolute Maximum Ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The Thermal Resistance and Power Dissipation ratings are measured under board mounted and still air conditions.

Symbol	Parameter	Min.	Max.	Units
V_B	High Side Floating Supply Voltage	-0.5	V_S + 20	V
V_S	High Side Floating Supply Offset Voltage	—	400	
V_{HO}	High Side Floating Output Voltage	V_S - 0.5	V_B + 0.5	
V_{CC}	Low Side Fixed Supply Voltage	-0.5	20	
V_{LO}	Low Side Output Voltage	-0.5	V_{CC} + 0.5	
V_{DD}	Logic Supply Voltage	-0.5	V_{SS} + 20	
V_{SS}	Logic Supply Offset Voltage	V_{CC} - 20	V_{CC} + 0.5	
V_{IN}	Logic Input Voltage (HIN, LIN & SD)	V_{SS} - 0.5	V_{DD} + 0.5	
dV_S/dt	Allowable Offset Supply Voltage Transient (Figure 2)	—	50	V/ns
P_D	Package Power Dissipation @ T_A £ +25°C	—	1.6	W
R_{thJA}	Thermal Resistance, Junction to Ambient	—	75	°C/W
T_J	Junction Temperature	-55	125	°C
T_S	Storage Temperature	-55	150	
T_L	Lead Temperature (Soldering, 10 seconds)	—	300	
	Weight	1.5 (typical)		g

Recommended Operating Conditions

The Input/Output logic timing diagram is shown in Figure 1. For proper operation the device should be used within the recommended conditions. The V_S and V_{SS} offset ratings are tested with all supplies biased at 15V differential. Typical ratings at other bias conditions are shown in Figures 36 and 37.

Symbol	Parameter	Min.	Max.	Units
V_B	High Side Floating Supply Absolute Voltage	V_S + 10	V_S + 20	V
V_S	High Side Floating Supply Offset Voltage	-4	400	
V_{HO}	High Side Floating Output Voltage	V_S	V_B	
V_{CC}	Low Side Fixed Supply Voltage	10	20	
V_{LO}	Low Side Output Voltage	0	V_{CC}	
V_{DD}	Logic Supply Voltage	V_{SS} + 5	V_{SS} + 20	
V_{SS}	Logic Supply Offset Voltage	-5	5	
V_{IN}	Logic Input Voltage (HIN, LIN & SD)	V_{SS}	V_{DD}	

Dynamic Electrical Characteristics

V_{BIAS} (V_{CC}, V_{BS}, V_{DD}) = 15V, and V_{SS} = COM unless otherwise specified. The dynamic electrical characteristics are measured using the test circuit shown in Figure 3.

		Tj = 25°C			Tj = -55 to 125°C			
Symbol	Parameter	Min.	Typ.	Max.	Min.	Max.	Units	Test Conditions
t_{on}	Turn-On Propagation Delay	—	120	150	—	260	ns	V_S = 0V
t_{off}	Turn-Off Propagation Delay	—	94	125	—	220		V_S = 400V
t_{sd}	Shutdown Propagation Delay	—	110	140	—	235		V_S = 400V
t_r	Turn-On Rise Time	—	25	35	—	50		C_L = 1000pf
t_f	Turn-Off Fall Time	—	17	25	—	40		C_L = 1000pf
MT	Delay Matching, HS & LS Turn-On/Off	—	—	10	—	—		$\lvert Ht_{on}-Lt_{on}\rvert / \lvert Ht_{off}-Lt_{off}\rvert$

Typical Connection

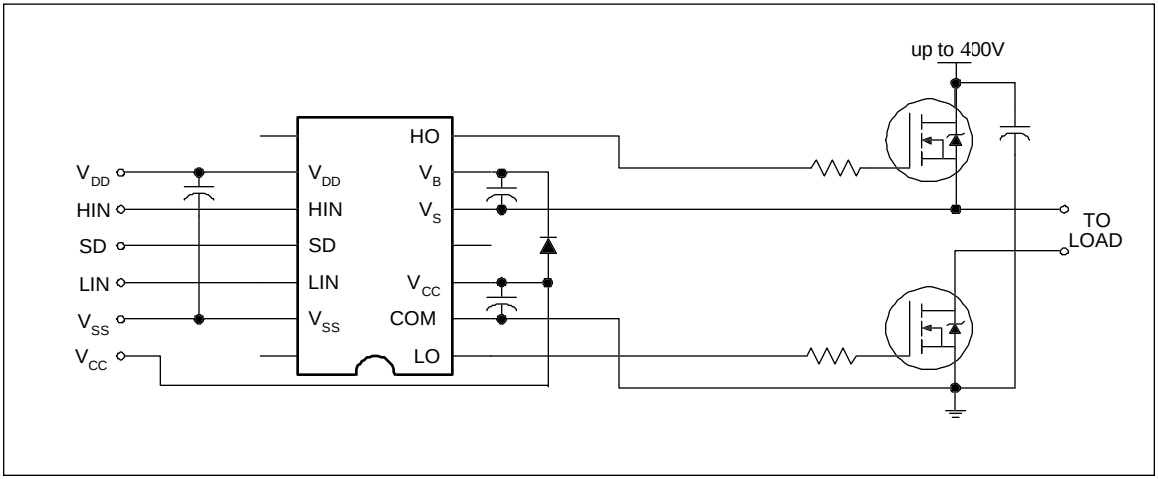

Static Electrical Characteristics

V_{BIAS} (V_{CC}, V_{BS}, V_{DD}) = 15V, unless otherwise specified. The V_{IN}, V_{TH} and I_{IN} parameters are referenced to V_{SS} and are applicable to all three logic input pins: HIN, LIN and SD. The V_O and I_O parameters are referenced to COM or V_S and are applicable to the respective output pins: HO or LO.

		Tj = 25°C			Tj = -55 to 125°C			
Symbol	Parameter	Min.	Typ.	Max.	Min.	Max.	Units	Test Conditions
V_{IH}	Logic "1" Input Voltage	3.1	—	—	3.3	—	V	V_{DD} = 5V
		6.4	—	—	6.8	—		V_{DD} = 10V
		9.5	—	—	10	—		V_{DD} = 15V
		12.5	—	—	13.3	—		V_{DD} = 20V
V_{IL}	Logic "0" Input Voltage	—	—	1.8	—	1.7	V	V_{DD} = 5V
		—	—	3.8	—	3.6		V_{DD} = 10V
		—	—	6	—	5.7		V_{DD} = 15V
		—	—	8.3	—	7.9		V_{DD} = 20V
V_{OH}	High Level Output Voltage, V_{BIAS} - V_O	—	0.7	1.2	—	1.5		V_{IN} = V_{IH}, I_O = 0A
V_{OL}	Low Level Output Voltage, V_O	—	—	0.1	—	0.1		V_{IN} = V_{IH}, I_O = 0A
I_{LK}	Offset Supply Leakage Current	—	—	50	—	250	µA	V_B = V_S = 400V
I_{QBS}	Quiescent V_{BS} Supply Current	—	125	230	—	500		V_{IN} =0V or V_{DD}
I_{QCC}	Quiescent V_{CC} Supply Current	—	180	340	—	600		V_{IN} =0V, or V_{DD}
I_{QDD}	Quiescent V_{DD} Supply Current	—	5	30	—	60		V_{IN} =0V, or V_{DD}
I_{IN+}	Logic "1" Input Bias Current	—	15	40	—	70		V_{IN} = V_{DD}
I_{IN-}	Logic "0" Input Bias Current	—	—	1.0	—	10		V_{IN} = 0V
V_{BSUV+}	V_{BS} Supply Undervoltage Positive Going Threshold	7.5	8.6	9.7	—	—	V	
V_{BSUV-}	V_{BS} Supply Undervoltage Negative Going Threshold	7.0	8.2	9.4	—	—		
V_{CCUV+}	V_{CC} Supply Undervoltage Positive Going Threshold	7.4	8.5	9.6	—	—		
V_{CCUV-}	V_{CC} Supply Undervoltage Negative Going Threshold	7.0	8.2	9.4	—	—		
I_{O+}	Output High Short Circuit Pulsed Current	2.0	—	—	—	—	A	V_O = 0V, V_{IN} = V_{DD} PW £ 10 µs
I_{O-}	Output Low Short Circuit Pulsed Current	2.0	—	—	—	—		V_O = 15V, V_{IN} = 0V PW £ 10 µs

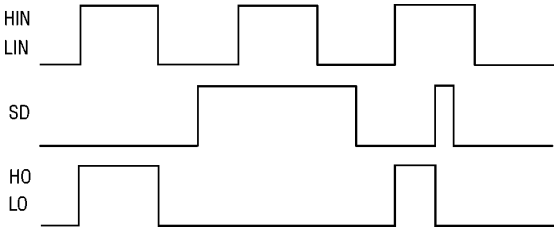

Figure 1. Input/Output Timing Diagram

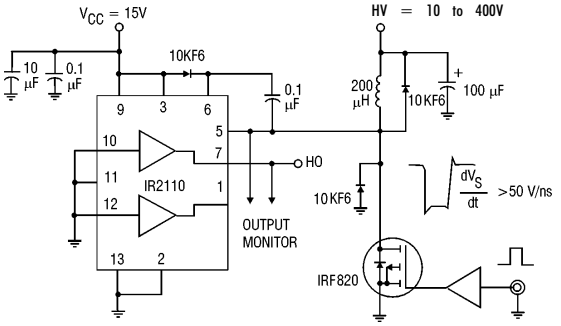

Figure 2. Floating Supply Voltage Transient Test Circuit

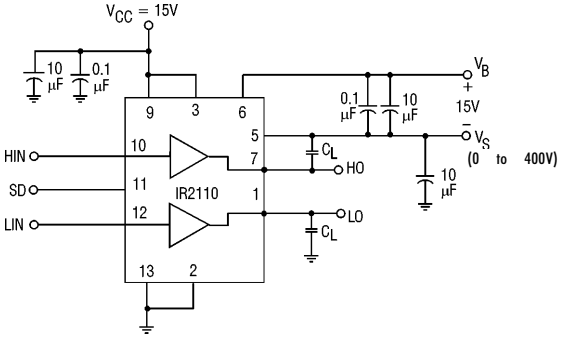

Figure 3. Switching Time Test Circuit

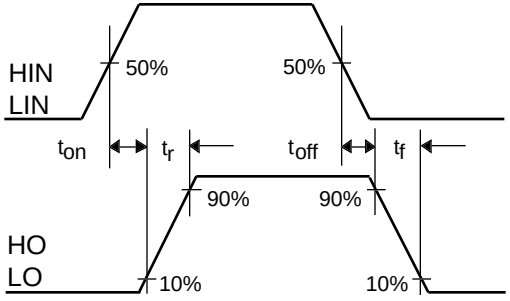

Figure 4. Switching Time Waveform Definition



Figure 5. Shutdown Waveform Definitions

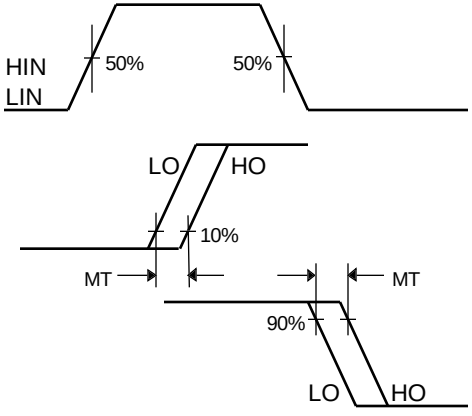

Figure 6. Delay Matching Waveform Definitions

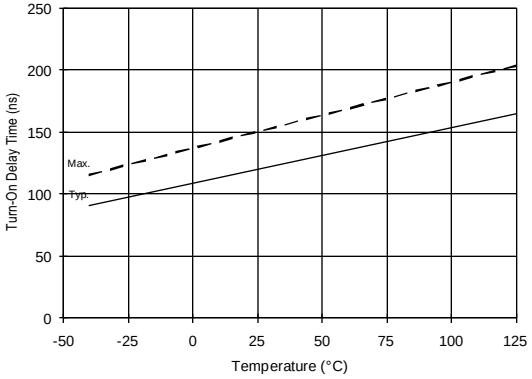

Figure 7A. Turn-On Time vs. Temperature

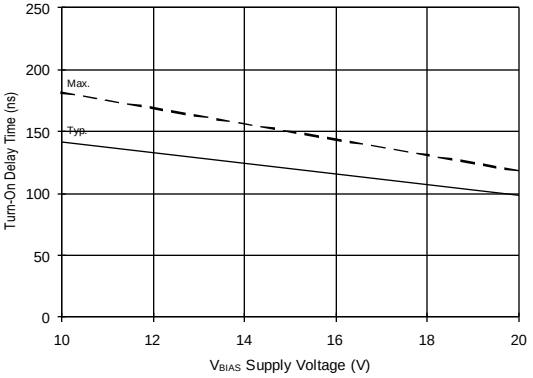

Figure 7B. Turn-On Time vs. Voltage

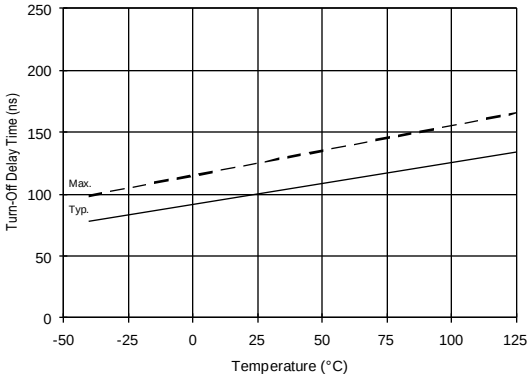

Figure 8A. Turn-Off Time vs. Temperature

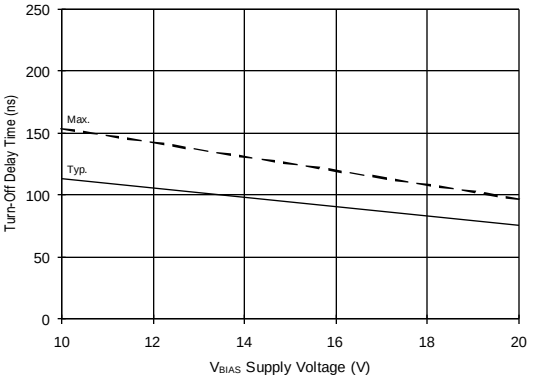

Figure 8B. Turn-Off Time vs. Voltage

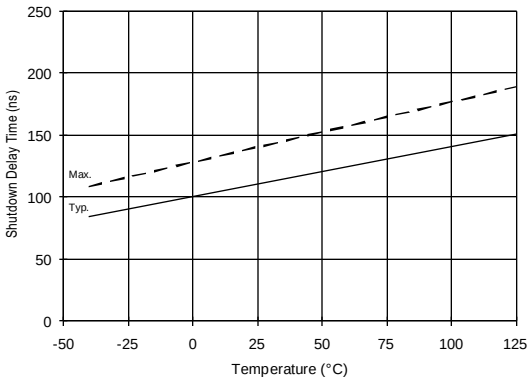

Figure 9A. Shutdown Time vs. Temperature

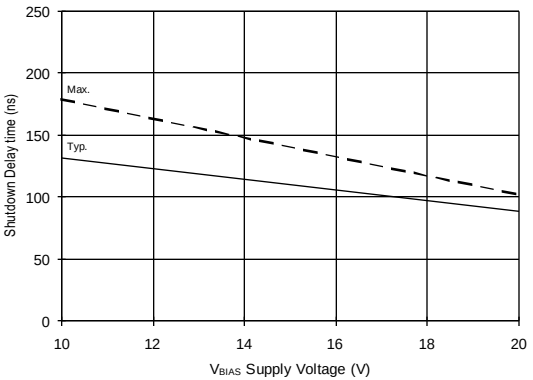

Figure 9B. Shutdown Time vs. Voltage

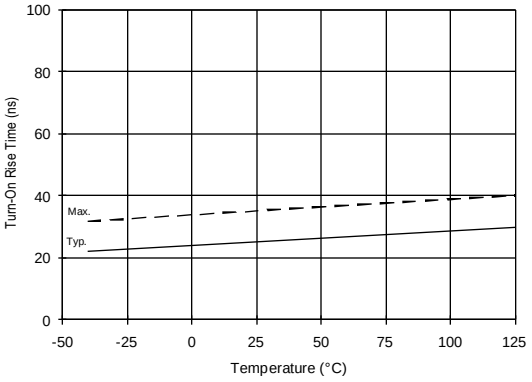

Figure 10A. Turn-On Rise Time vs. Temperature

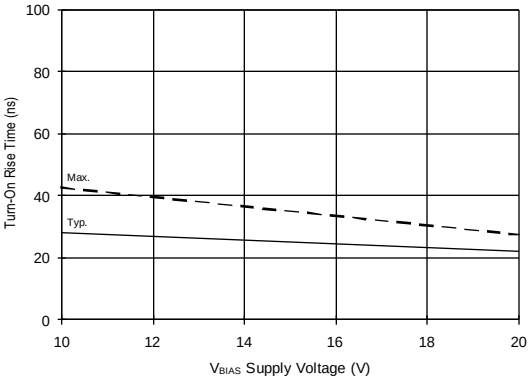

Figure 10B. Turn-On Rise Time vs. Voltage

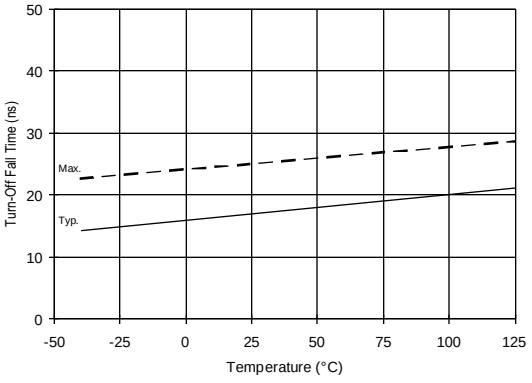

Figure 11A. Turn-Off Fall Time vs. Temperature

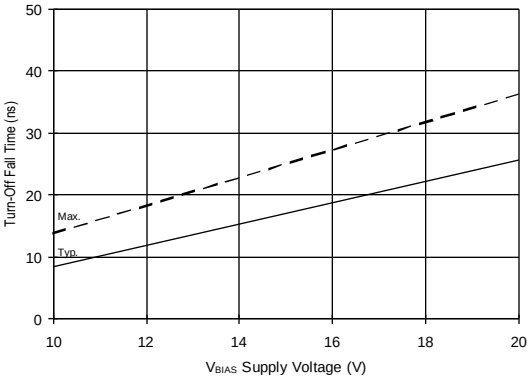

Figure 11B. Turn-Off Fall Time vs. Voltage

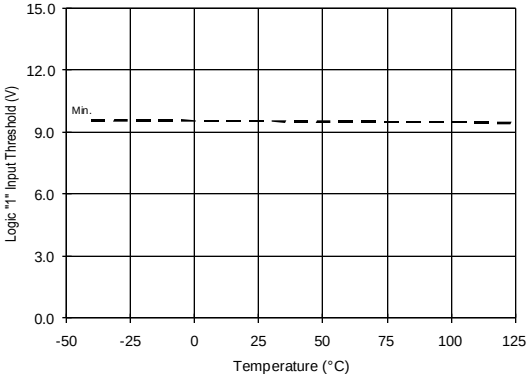

Figure 12A. Logic “1” Input Threshold vs. Temperature

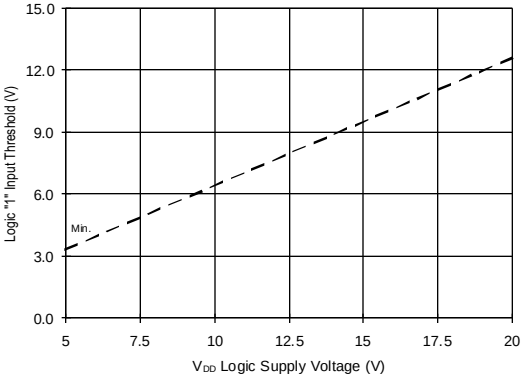

Figure 12B. Logic “1” Input Threshold vs. Voltage

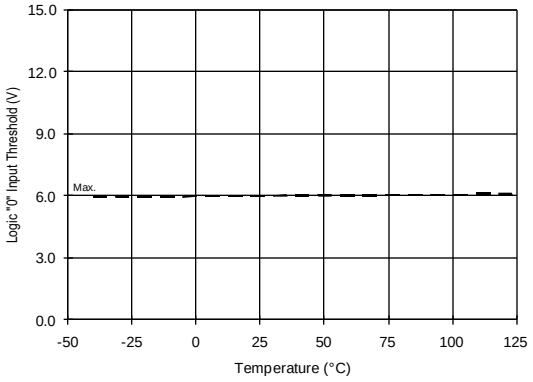

Figure 13A. Logic “0” Input Threshold vs. Temperature

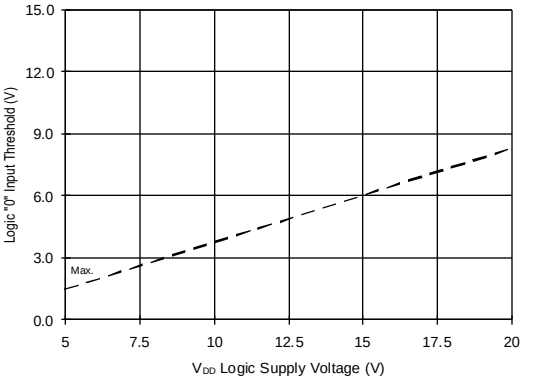

Figure 13B. Logic “0” Input Threshold vs. Voltage

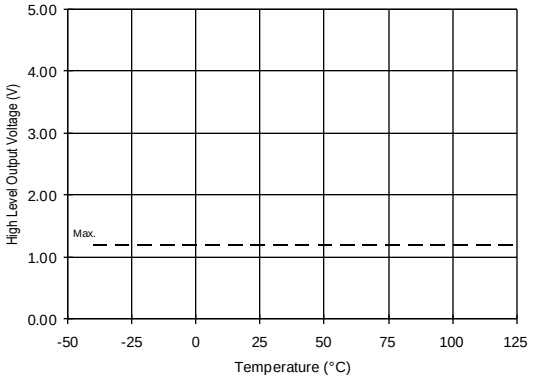

Figure 14A. High Level Output vs. Temperature

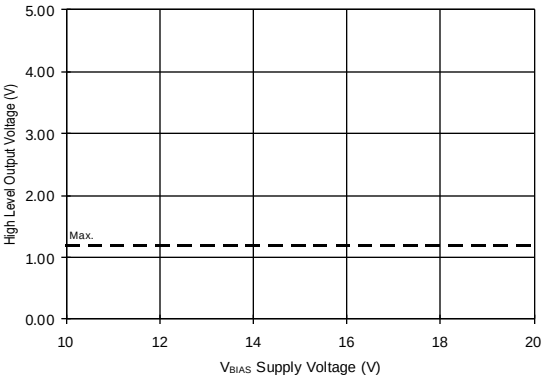

Figure 14B. High Level Output vs. Voltage

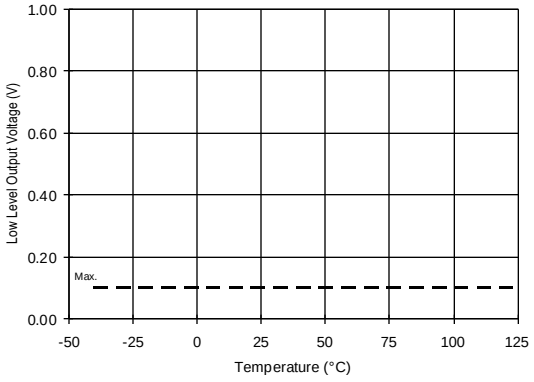

Figure 15A. Low Level Output vs. Temperature

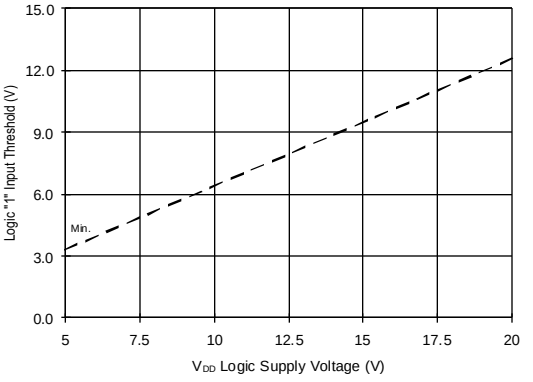

Figure 15B. Low Level Output vs. Voltage

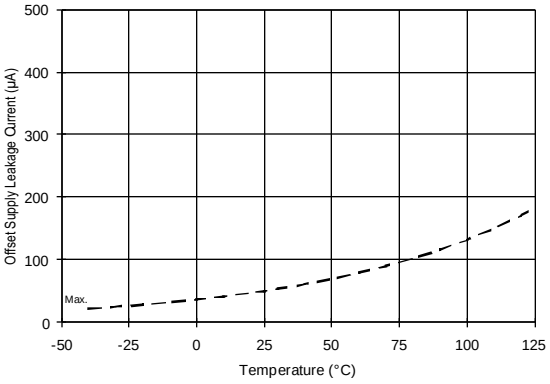

Figure 16A. Offset Supply Current vs. Temperature

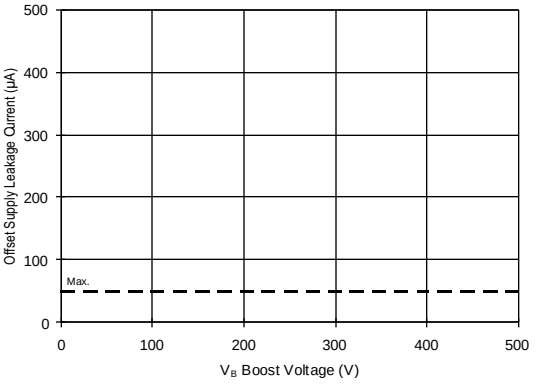

Figure 16B. Offset Supply Current vs. Voltage

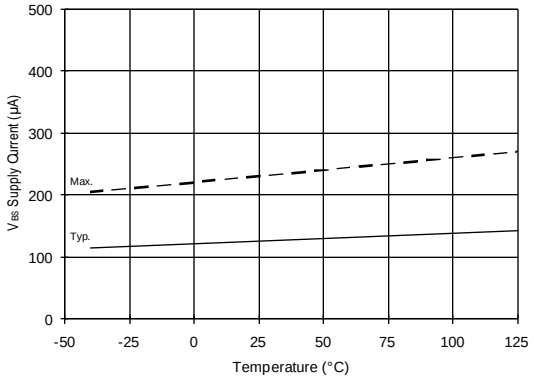

Figure 17A. V_{BS} Supply Current vs. Temperature

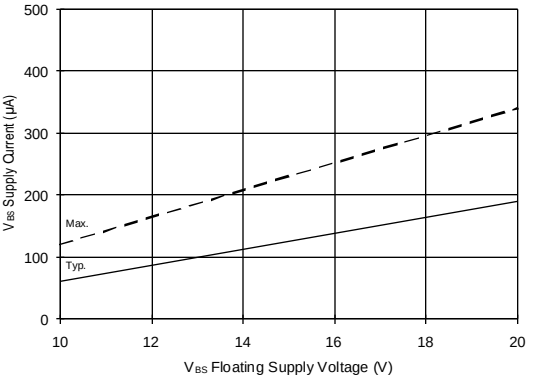

Figure 17B. V_{BS} Supply Current vs. Voltage

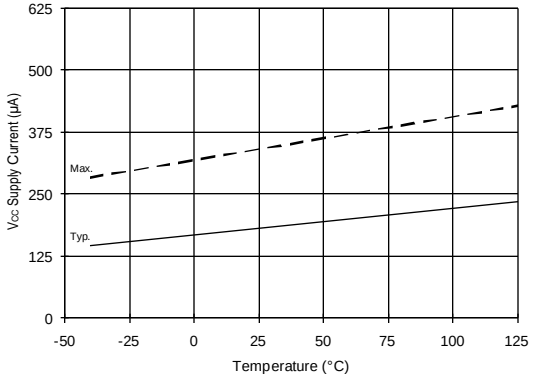

Figure 18A. V_{CC} Supply Current vs. Temperature

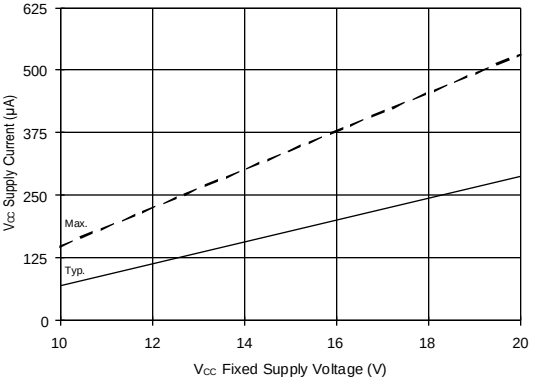

Figure 18B. V_{CC} Supply Current vs. Voltage

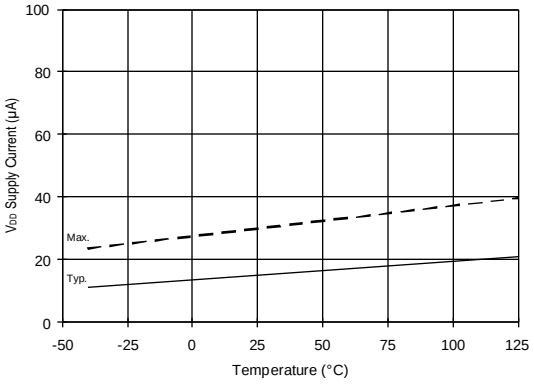

Figure 19A. V_{DD} Supply Current vs. Temperature

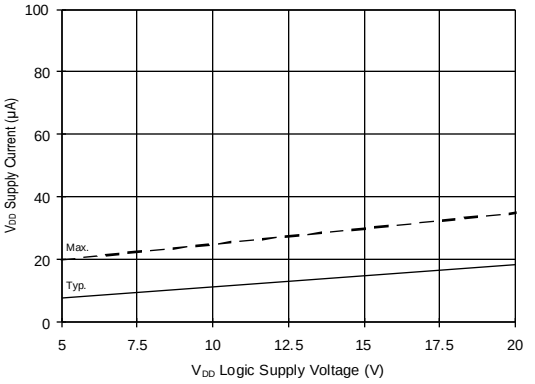

Figure 19B. V_{DD} Supply Current vs. Voltage

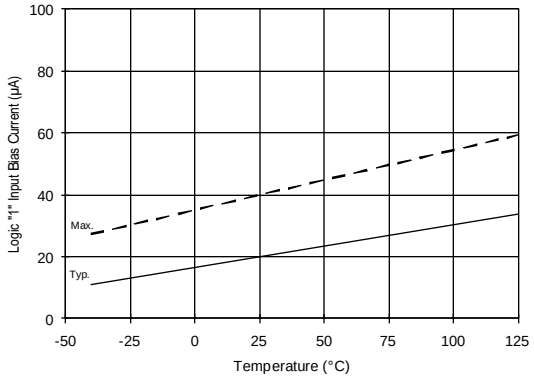

Figure 20A. Logic “1” Input Current vs. Temperature

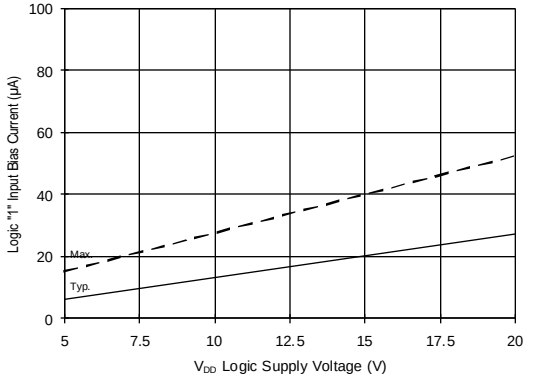

Figure 20B. Logic “1” Input Current vs. Voltage

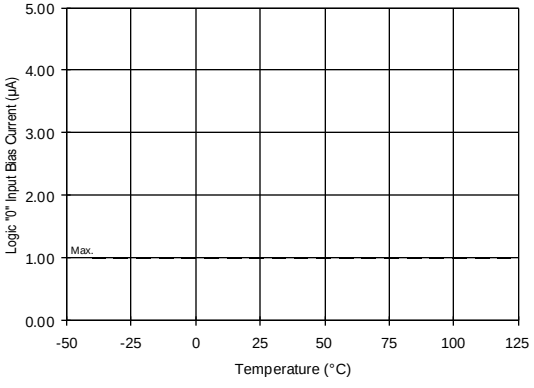

Figure 21A. Logic “0” Input Current vs. Temperature

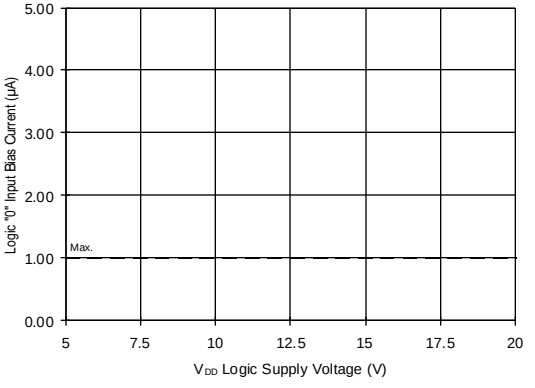

Figure 21B. Logic “0” Input Current vs. Voltage

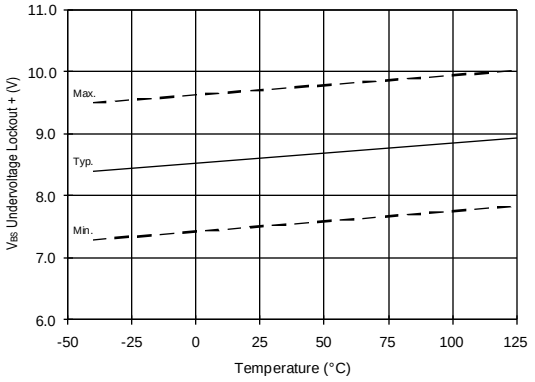

Figure 22. V_{BS} Undervoltage (+) vs. Temperature

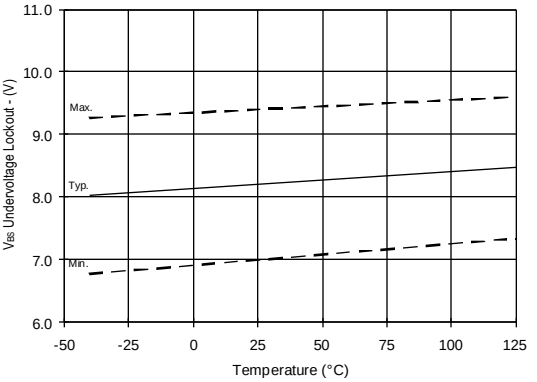

Figure 23. V_{BS} Undervoltage (-) vs. Temperature

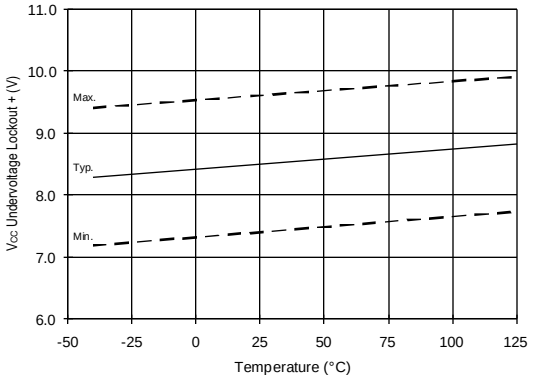

Figure 24. V_{CC} Undervoltage (+) vs. Temperature

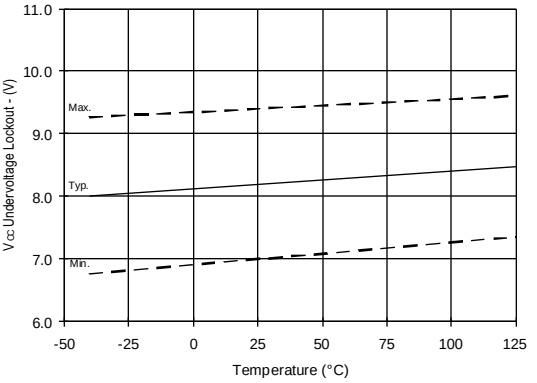

Figure 25. V_{CC} Undervoltage (-) vs. Temperature

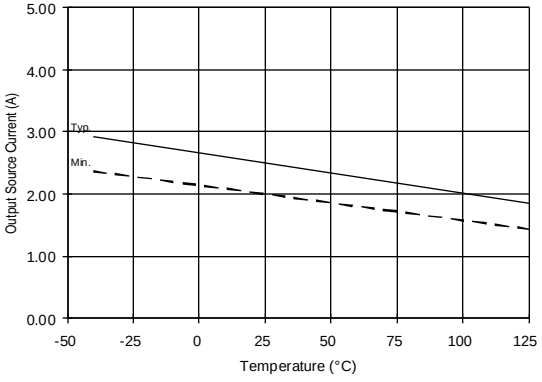

Figure 26A. Output Source Current vs. Temperature

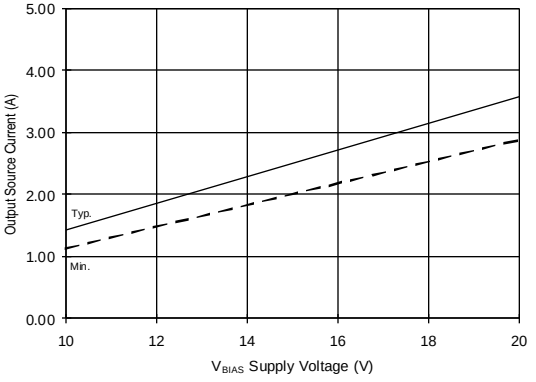

Figure 26B. Output Source Current vs. Voltage

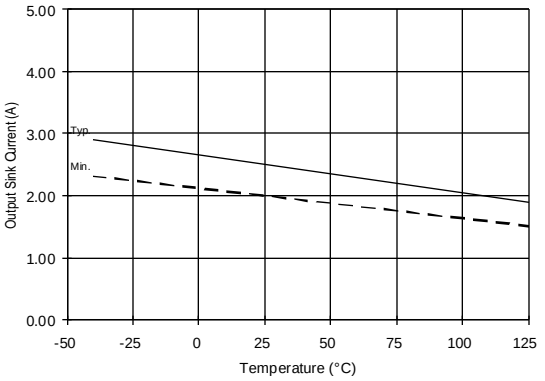

Figure 27A. Output Sink Current vs. Temperature

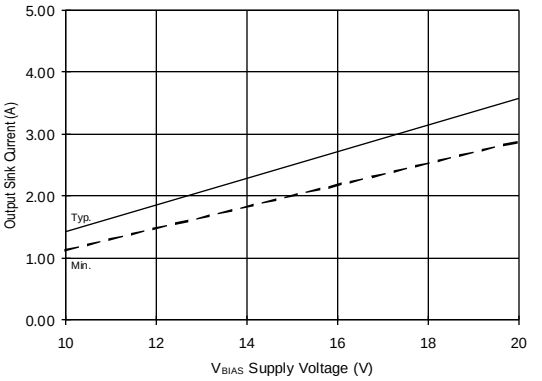

Figure 27B. Output Sink Current vs. Voltage

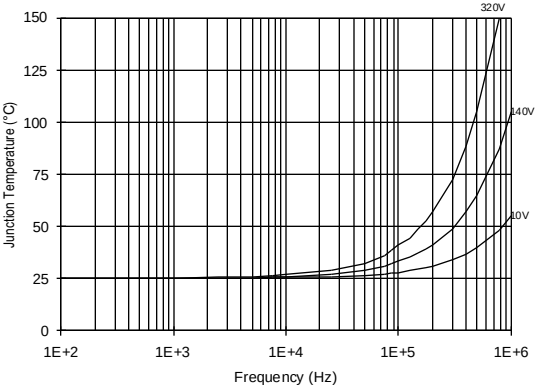

Figure 28. IR2110L6 T_J vs. Frequency (IRFBC20)
R_{GATE} = 33W, V_{CC} = 15V

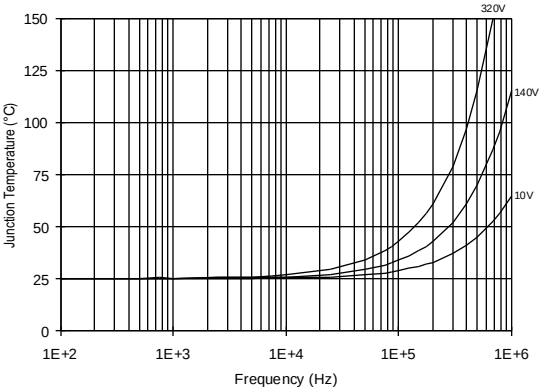

Figure 29. IR2110L6 T_J vs. Frequency (IRFBC30)
R_{GATE} = 22W, V_{CC} = 15V

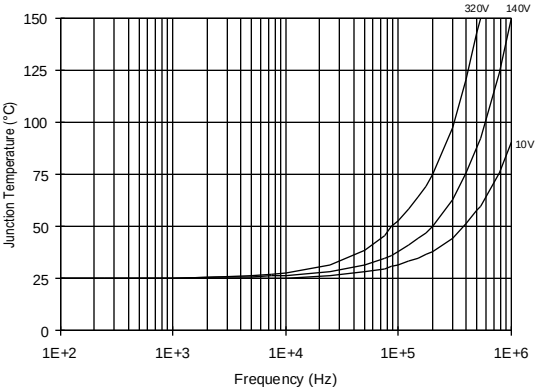

Figure 30. IR2110L6 T_J vs. Frequency (IRFBC40)
R_{GATE} = 15W, V_{CC} = 15V

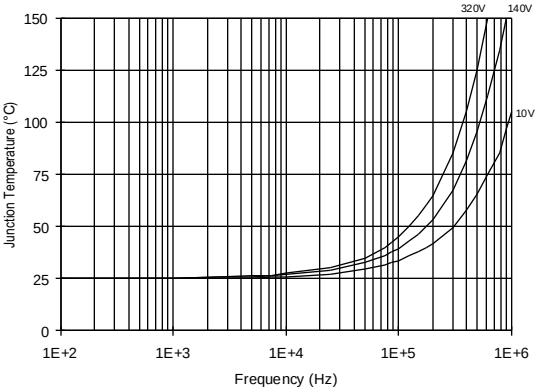

Figure 31. IR2110L6 T_J vs. Frequency (IRFPE50)
R_{GATE} = 10W, V_{CC} = 15V

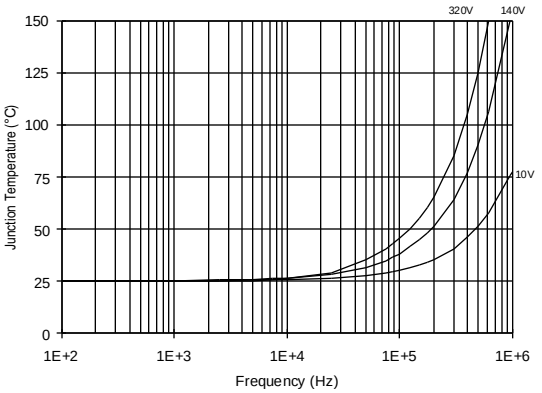

Figure 32. IR2110L6S T_J vs. Frequency (IRFBC20)
R_{GATE} = 33W, V_{CC} = 15V

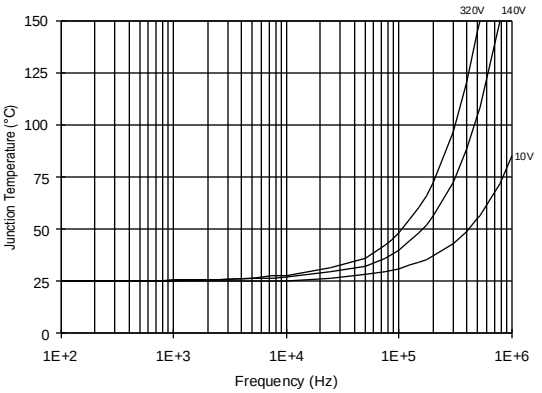

Figure 33. IR2110L6S T_J vs. Frequency (IRFBC30)
R_{GATE} = 22W, V_{CC} = 15V

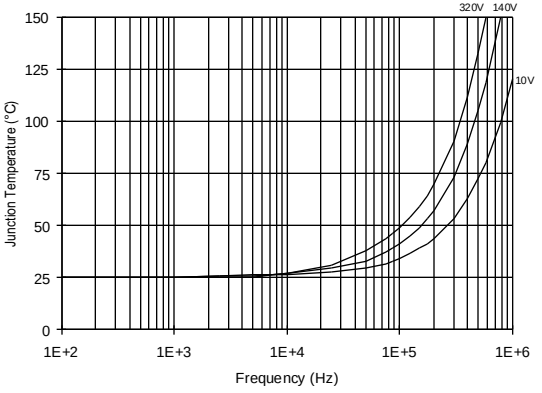

Figure 34. IR2110L6S T_J vs. Frequency (IRFBC40)
R_{GATE} = 15W, V_{CC} = 15V

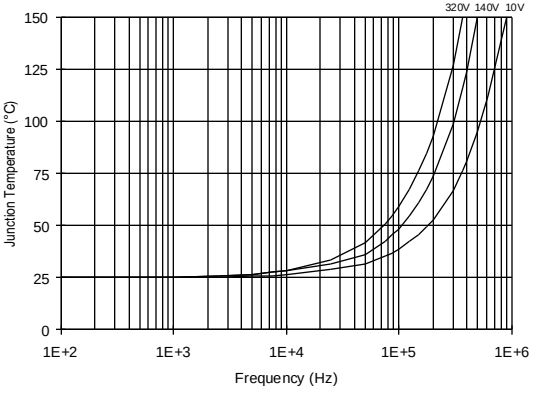

Figure 35. IR2110L6S T_J vs. Frequency (IRFPE50)
R_{GATE} = 10W, V_{CC} = 15V

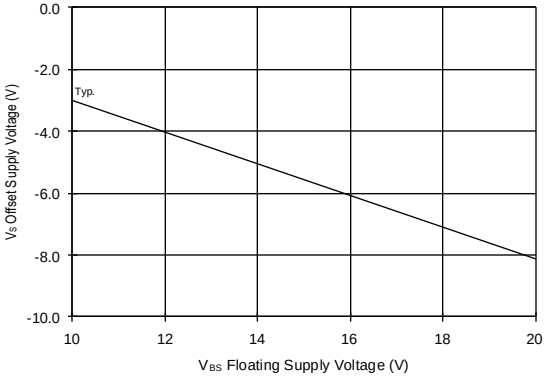

Figure 36. Maximum V_S Negative Offset vs.
V_{BS} Supply Voltage

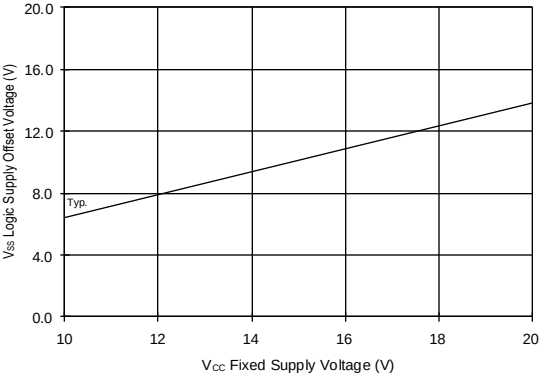

Figure 37. Maximum V_{SS} Positive Offset vs.
V_{CC} Supply Voltage

Functional Block Diagram

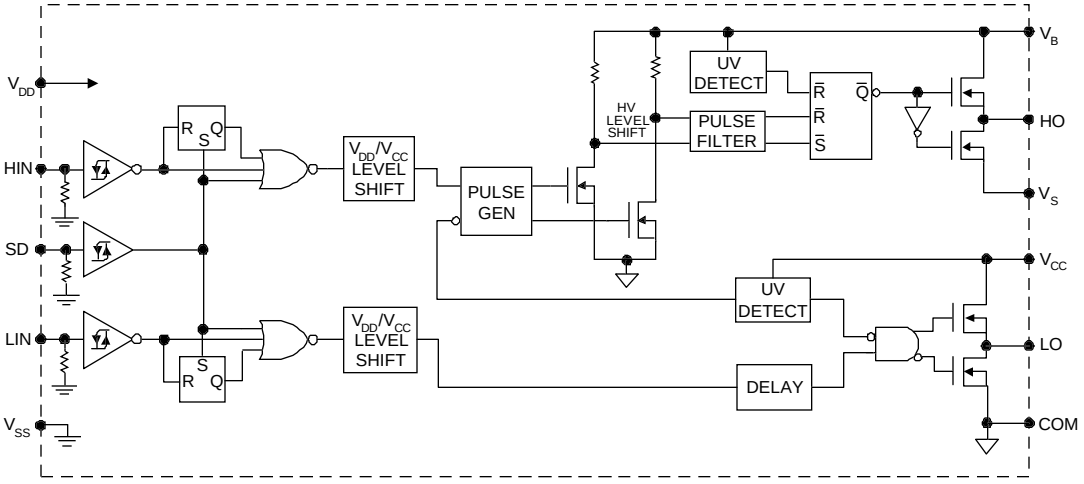

Lead Definitions

Lead Symbol	Description
V_{DD}	Logic supply
HIN	Logic input for high side gate driver output (HO), in phase
SD	Logic input for shutdown
LIN	Logic input for low side gate driver output (LO), in phase
V_{SS}	Logic ground
V_B	High side floating supply
HO	High side gate drive output
V_S	High side floating supply return
V_{CC}	Low side supply
LO	Low side gate drive output
COM	Low side return

Case Outline and Dimensions — MO-036AB



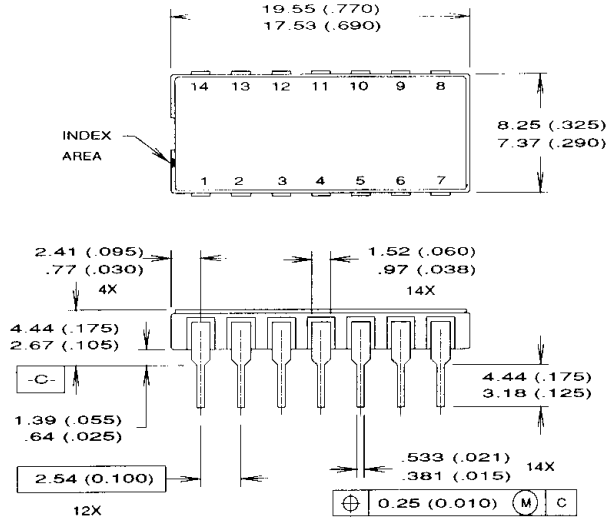

Pin Assignment



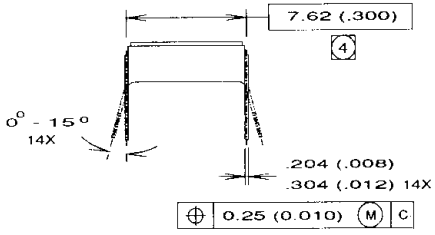

NOTES:

1 DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.

2 CONTROLLING DIMENSION : INCH.

3 DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).

4 DIMENSION IS TO CENTER OF LEADS WHEN FORMED PARALLEL.

5 OUTLINE CONFORMS TO JEDEC OUTLINE MO-036AB.

International
IOR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 732020
IR CANADA: 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo Japan 171 Tel: 81 3 3983 0086
IR SOUTHEAST ASIA: 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: 65 221 8371